UP-SORBER ROLL

architected sound

UP-SORBER ROLL

One space, diverse capabilities



This catalogue is intended to provide information for illustrative purposes only. All rights reserved.

Publication: 2024





high tones

UP-SORBER ROLL is an electrically adjustable banner that can change room's acoustic conditions in the blink of an eye. Customizing the space function has never been so quick and convenient.




UP-SORBER ROLL banners can be ordered in individually selected sizes and colours, which allows you to design the interior with an original visual form and excellent acoustic properties.



6

archite




UP-SORBER ROLL



high tones mid tones

Up-Sorber Roll was created to meet the requirements of adjusting the acoustics in multifunctional spaces. This purpose was achieved by designing the fabric surface rolled up or down to any length required to fit particular environment. Thanks to dedicated control system, setting proper acoustics has never been easier.

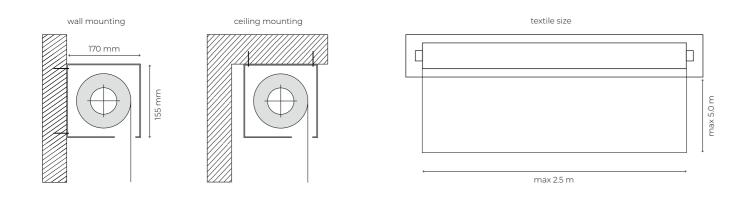

Description

Size width: standard 1.4 m,

max 2.5 m length: max 5.0 m

Weight ca. 26 kg

Material absorptive fabrics

Available in various sizes and colours according to individual project.



allutan

Designer Architected Sound Team

Country of production Poland

architected sound

Category absorption

Application Multifunctional rooms, concert halls,

Up-Sorber Roll contains an expandable surface made of textile materials, ensuring the regulation of reverberation time in the range of medium and high tones by increasing the acoustic absorption of the interior and eliminating the first reflections of the sound.

Up-Sorber Roll can be made of one or two layers of textile. The latter increases acoustic absorption in low frequencies and allows obtaining maximum uniformity of acoustic

The system is designed to be installed on walls or ceilings. Specialized mounting procedure required due to individual character of each project.

conditions in the whole room.

Sound absorption coefficient $\alpha_{w, max} = 0.65$

Fire safety Made of materials with flammability class B-s2. d0.

Non-standard length and width

possible. Possibility of creating a passive surface that can be made

such as steel cables or mesh.

of materials ensuring free air flow,

theaters, lecture and conference rooms, home listening rooms, rooms

in buildings under the supervision

with adjustable limit switches. Wired

The electric drive is equipped

or radio control, with the ability

to group more banners. Possibility

of integration with external control

of the conservator.

Drive parameters:

Custom-made


power supply: 230 V power consumption during

operation: max 200 W

Control

systems.

Architected Sound Up-Sorber Roll - sound absorption coefficients

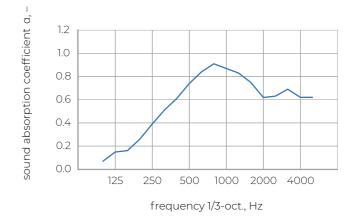

Practical sound absorption coefficient α_p

frequency 1/1-oct.
125 Hz
250 Hz
500 Hz
1000 Hz
2000 Hz
4000 Hz

distance of the expanded surface from the wall: 100 mm

0.15
0.40
0.75
0.85
0.65
0.65

Expanded UP-SORBER ROLL banners reduce the reverberation time of the interior and increases its acoustic absorption, preventing the first reflection of sound waves generated, for example, by loudspeakers. Rolled up they are invisible and do not interfere with the interior design.



Architected Sound

ul. Chalubinskiego 53 30-698 Krakow, Poland info@architected-sound.com +48 12 259 13 00

www.architected-sound.com

dlutan.